


# 7.2 Panel Product Guide

HELPFUL INFORMATION ON PANELS, TRIMS, PURLINS, GUTTERS AND ACCESSORIES

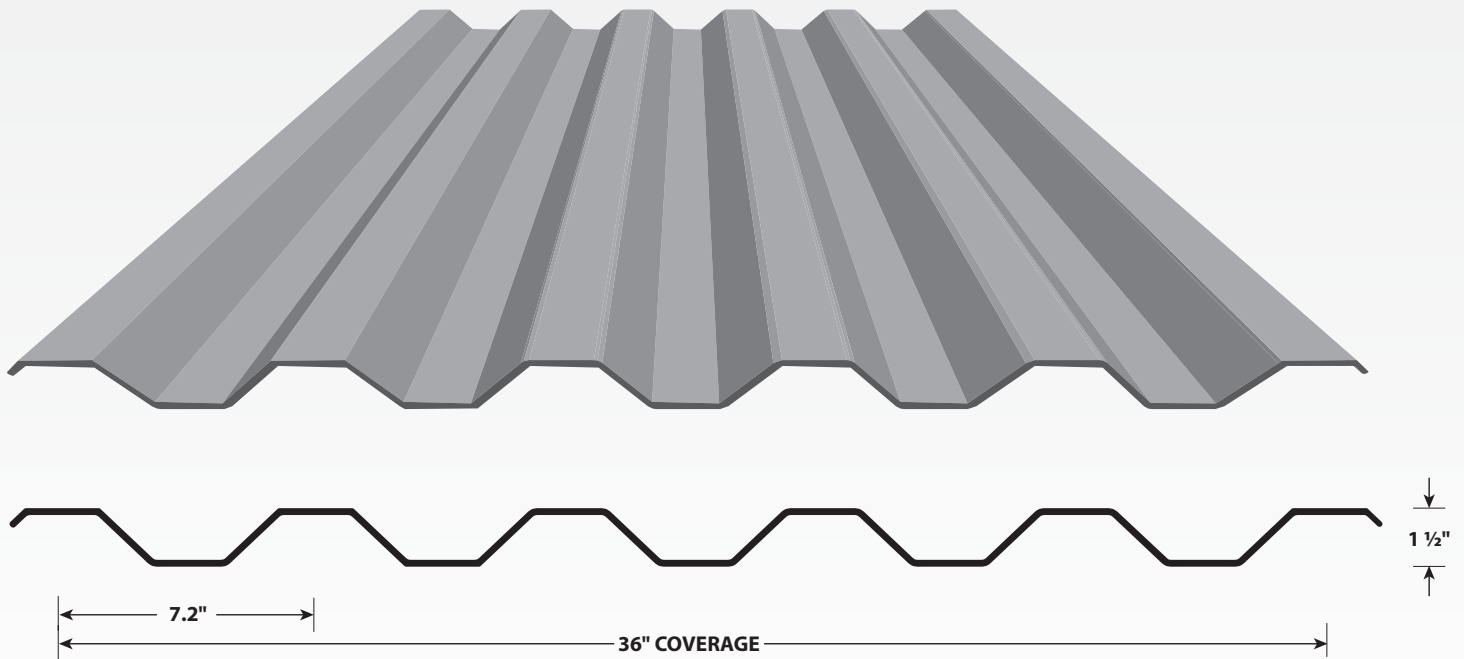

***We promise to improve your business  
by accurately providing quality products  
right when you need them. Every time.***

Visit our website for more product information, testing, energy ratings, warranties, photo gallery, roofing visualizer, and more.

**centralstatesco.com**

# INDEX

---

*Information in this catalog may vary by plant location.  
Please call your salesperson to verify product availability.*

Warranties	4
Panel Codes	4
Section Properties / Live & Wind Loads	5
Fastener Spacing	6
Care and Handling	6-7
Converting Pitch to Degree	8
Square Conversions	9
Gauge and Color Codes	10
Roof Trims	11-12
Wall Trims	13
Gutters	14-15
Accessories	16-17
Secondary Framing	18-19
Standard Punch Patterns	20-21

*NOTICE: The application and detail drawings in this manual are strictly for illustration purposes and may not be applicable to all building designs or product installations. Projects should conform to local building codes. Central States Manufacturing is not responsible for the performance of the material if it is not installed correctly.*

*Information contained in this booklet was in effect at the time of publication and is subject to change without notice.*

# 7.2 PANEL

7.2 panel is available with 36" coverage in 24 ga. bare Galvalume® and five colors of 26 ga. painted and bare Galvalume®. 7.2 panel is also available with 28.8" coverage in eighteen colors of 26 ga. painted and bare Galvalume®. Prime panels come with CentralGuard protection that includes superior dent resistance, a lifetime limited paint warranty, and a 20-year substrate warranty. Bare (non-painted) panels from Central States have an acrylic coating which eliminates using oils during manufacturing, and eliminates fingerprinting and foot marking during installation. Bare, unpainted Galvalume is not warranted for uniformity in appearance, whether it be color, sheen, or spangle. If the project requires a uniform appearance, please choose a painted product.

Central States' 26 ga. steel is manufactured to meet ASTM A792 specifications for galvalume with a minimum yield of 80,000 PSI. The recommended minimum roof slope is 1/2:12 pitch. This will allow for sufficient drainage of water. For added protection, a sealant tape can be used on the laps of the panel.

### 7.2 (36" Coverage)



### 7.2 (28.8" Coverage)



## PANEL CODES

PANEL PROFILE	TYPE	CODE	COLOR AVAILABILITY
7.2 - 36" Coverage	24 Gauge Ultra	724(color)	GL
7.2 - 36" Coverage	26 Gauge Prime	726(color)	BI, BS, CH, GA, GL, LS
7.2 - 28.8" Coverage	26 Gauge Prime	7N6(color)	all

# WARRANTIES



### WARRANTIES

Warranties are available in paper format and downloadable from our website. After the job is complete, fill out a warranty with your contractor/installer details and the Central States order number. Give the warranty to the building owner to keep for their records. Optional warranty registration is available online.

*Learn more at [centralstatesco.com/warranties](http://centralstatesco.com/warranties)*

# SECTION PROPERTIES

## 36" AND 28.8" WIDE, CSMI 7.2 PANEL

Gauge	Thickness (inches)	Weight (psf)	Yield Stress (ksi)	Shear Strength Va kips/ft	Top in Compression (Positive Bending)			Bottom in Compression (Negative Bending)		
					Ixx	Sxx	Ma	Ixx	Sxx	Ma
					in4/ft	in3/ft	in.kips/ft	in4/ft	in3/ft	in.kips/ft
26	0.0185	0.940	80.0	0.73	0.0713	0.0834	2.502	0.0670	0.0694	2.494
24	0.0230	1.168	50.0	1.31	0.0983	0.1215	3.637	0.0977	0.1097	3.287

Section properties and allowables are calculated in accordance with North American Specification for the Design of Cold-Formed Steel Structural Members (2012 & 2016 Edition). I +/- is for deflection determination, S +/- is for bending determination & Ma is allowable bending moment. Va is allowable shear strength of panel web elements. All values are for one foot of panel width. Minimum deliverable bare steel thickness should not be less than 0.95 of design thickness.

# THEORETICAL ALLOWABLE LIVE & WIND LOADS

## SINGLE SPAN CONDITION

Span (feet)	26 Gauge & 80 ksi					24 Gauge & 50 ksi				
	LL (S) (psf)	LL (D) L/180 (psf)	WL (D) L/240 (psf)	WL (S) (psf)	WL (D) L/180 (psf)	LL (S) (psf)	LL (D) L/180 (psf)	WL (D) L/240 (psf)	WL (S) (psf)	WL (D) L/180 (psf)
2	417.1	417.1	417.1	415.7	415.7	600.4	600.4	600.4	547.8	547.8
2.5	266.9	266.9	266.9	266.1	266.1	384.3	384.3	384.3	350.6	350.6
3	185.4	185.4	173.2	184.8	184.8	266.9	266.9	238.8	243.5	243.5
3.5	136.2	136.2	109.1	135.7	135.7	196.1	196.1	150.4	178.9	178.9
4	104.3	97.4	73.1	103.9	91.5	150.1	134.3	100.7	136.9	133.4
5	66.7	49.9	37.4	66.5	46.9	96.1	68.8	51.6	87.6	68.3
6	46.3	28.9	21.6	46.2	27.1	66.7	39.8	29.8	60.9	39.5
7	34.0	18.2	13.6	33.9	17.1	49.0	25.1	18.8	44.7	24.9

## TWO SPAN CONDITION

Span (feet)	26 Gauge & 80 ksi					24 Gauge & 50 ksi				
	LL (S) (psf)	LL (D) L/180 (psf)	WL (D) L/240 (psf)	WL (S) (psf)	WL (D) L/180 (psf)	LL (S) (psf)	LL (D) L/180 (psf)	WL (D) L/240 (psf)	WL (S) (psf)	WL (D) L/180 (psf)
2	337.9	337.9	337.9	338.6	338.6	485.8	485.8	485.8	525.1	525.1
2.5	230.8	230.8	230.8	231.4	231.4	323.6	323.6	323.6	352.2	352.2
3	166.7	166.7	166.7	167.1	167.1	230.0	230.0	230.0	251.4	251.4
3.5	125.6	125.6	125.6	126.0	126.0	171.4	171.4	171.4	188.0	188.0
4	97.8	97.8	97.8	98.1	98.1	132.5	132.5	132.5	145.6	145.6
5	63.9	63.9	63.9	64.1	64.1	85.8	85.8	85.8	94.5	94.5
6	44.9	44.9	44.9	45.1	45.1	60.0	60.0	60.0	66.1	66.1
7	33.2	33.2	32.8	33.3	33.3	44.2	44.2	44.2	48.8	48.8

## THREE OR MORE SPAN CONDITION

Span (feet)	26 Gauge & 80 ksi					24 Gauge & 50 ksi				
	LL (S) (psf)	LL (D) L/180 (psf)	WL (D) L/240 (psf)	WL (S) (psf)	WL (D) L/180 (psf)	LL (S) (psf)	LL (D) L/180 (psf)	WL (D) L/240 (psf)	WL (S) (psf)	WL (D) L/180 (psf)
2	376.6	376.6	376.6	377.3	377.3	550.5	550.5	550.5	592.2	592.2
2.5	260.4	260.4	260.4	261.0	261.0	369.9	369.9	369.9	401.2	401.2
3	189.6	189.6	189.6	190.1	190.1	264.4	264.4	264.4	288.2	288.2
3.5	143.7	143.7	143.7	144.1	144.1	197.8	197.8	197.8	216.4	216.4
4	112.4	112.4	112.4	112.7	112.7	153.3	153.3	153.3	168.1	168.1
5	73.8	73.8	70.6	74.0	74.0	99.6	99.6	97.3	109.5	109.5
6	52.0	52.0	40.9	52.2	51.2	69.7	69.7	56.3	76.8	74.6
7	38.6	34.3	25.7	38.7	32.2	51.5	47.3	35.5	56.8	47.0

LL (S) is allowable live load based on stress limitation & LL (D) on stress & deflection limitation of L/180 or L/240. WL (S) is allowable wind load based on stress limitation & WL (D) on stress & deflection limitation of L/180. Allowable wind loads based on stress have not been increased by 33.33% for wind uplift. These loads are for panel strength. Frames, purlins, fasteners and all supports must be designed to resist all loads imposed on the panel. The wind load is permitted to be taken as 0.7 times the "component and cladding" loads for the purpose of determining deflection limits. For roof panels, self weight of the panel has to be deducted from the allowable inward load to arrive at the actual 'live load' carrying capacity of the panel.

# FASTENER SPACING

---

Fastener pattern for all conditions: interior, and panel termination (eave, endlap, valley)

## 7.2 (36" Coverage)



## 7.2 (28.8" Coverage)



# CARE AND HANDLING

---

### DELIVERY

Deliveries will be made using a 65' tractor/trailer weighing approximately 80,000 lbs. It is imperative that all delivery locations be accessible by a vehicle of this size. Our drivers have the authority to refuse delivery to any location they see as unsafe or inaccessible. The customer is responsible for any charges incurred if truck is detained for any reason. The customer is responsible for unloading all trucks. Any damage that occurs at this point is the customer's responsibility. There must be equipment available to unload the truck. Moffett deliveries require at least one person to assist with unloading.

### STAGE

Galvalume® steel panels have a good service life when exposed to normal weather conditions; however, to protect the appearance of panels and trims

from damage, there are a few simple precautions that can be taken. The panels are subject to stain when water sits upon, or becomes trapped between the sheets. If the Galvalume® panels are to be stored for any period of time, they should be stored only in a dry place, preferably under a roof. Stand panels on end and fan them out at the bottom to provide air circulation and moisture run off. If space does not allow this, the panels should be separated, blocked off of the floor at least 12 inches to allow air flow, and stored at an incline to encourage drainage. The panels should then be covered, yet still have good air flow through the sheets to prevent condensation. Do not use a plastic cover, as this may cause the panels to sweat or condensation to occur.

# CARE AND HANDLING

---

## **STORAGE**

Failure to follow these steps may result in wet storage stains and premature rusting. The manufacturer's warranty will be void at this time, and the manufacturer will not be responsible.

## **HANDLING**

When unloading panels, extreme caution must be employed. Care needs to be used when unloading panels with a forklift. Panel edges and underside paint may become damaged if the forklift driver does not use caution. Once at the job site, care must be taken in order to protect the painted surface. When unbundling the panels, never drag them across the surface of one another. This may cause scratches across the underneath panels. It is recommended that the panels be "rolled" off the top of the bundle to prevent scratching. Never lift panels by the ends, instead lift the panels longitudinally and carry vertically.

Panel edges are very sharp, therefore, safety equipment should be worn by all workers handling the material.

## **CUTTING**

A portable field shear is the ideal method for cutting panels. Nibblers or a power shear may also be used. Although we do not recommend it, if you decide to cut with a saw, it is very important that the panels be turned upside down during cutting so that hot shavings do not come in contact with the painted surface. Make sure all adjacent panels are covered so that shavings are not imbedded in these panels. If metal shavings become imbedded in the paint surface, they will quickly rust. To avoid this, panels should be thoroughly wiped of all filings on both sides of the panel. Failure to comply with the recommended cutting procedures releases the manufacturer of any responsibility.

## **DRILLING**



Panels and trim should not be drilled while stacked. This will cause shavings that will become imbedded in the paint surface.

**Shavings created by  
saw cutting or drilling  
may cause the panel to rust  
and will void warranties in  
affected areas.**



# CONVERTING PITCH TO DEGREE

Use these charts to calculate degrees when designing custom trim.  
Please specify pitch when ordering.

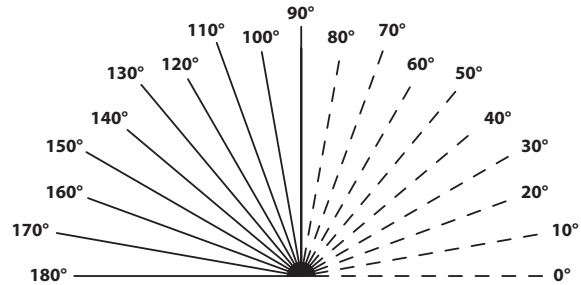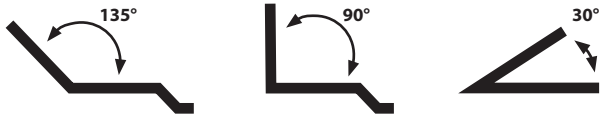

## SINGLE SLOPE PITCHES

Fascia, Eave, Endwall, Tie-In, Gutter

1:12 PITCH	2:12 PITCH	3:12 PITCH	4:12 PITCH	5:12 PITCH	6:12 PITCH	7:12 PITCH	8:12 PITCH	9:12 PITCH	10:12 PITCH	11:12 PITCH	12:12 PITCH
94°	99°	104°	108°	112°	116°	120°	123°	126°	129°	132°	135°
173°	167°	160°	154°	148°	143°	138°	134°	130°	126°	123°	120°
170°	161°	152°	143°	135°	127°	120°	113°	106°	100°	95°	90°

## DOUBLE SLOPE PITCHES

Hip, Valley


## RIDGE CAP

## TRANSITION TRIM


Find the box that intersects your lower and upper roof pitches.

If the intersection lands in the gray area, select a Lower Transition trim.

Upper Transition Trim



Lower Transition Trim



## LOWER ROOF PITCH (INCHES OF RISE OVER 12" OF RUN)

	1:12 PITCH	2:12 PITCH	3:12 PITCH	4:12 PITCH	5:12 PITCH	6:12 PITCH	7:12 PITCH	8:12 PITCH	9:12 PITCH	10:12 PITCH	11:12 PITCH	12:12 PITCH	13:12 PITCH	14:12 PITCH	15:12 PITCH	16:12 PITCH	17:12 PITCH	18:12 PITCH
1:12 PITCH		175°	171°	166°	162°	158°	155°	151°	148°	145°	142°	140°	137°	135°	133°	132°	130°	128°
2:12 PITCH	175°		175°	171°	167°	163°	159°	156°	153°	150°	147°	144°	142°	140°	138°	136°	135°	133°
3:12 PITCH	171°	175°		176°	171°	167°	164°	160°	157°	154°	152°	149°	147°	145°	143°	141°	139°	138°
4:12 PITCH	166°	171°	176°		176°	172°	168°	165°	162°	159°	156°	153°	151°	149°	147°	145°	144°	142°
5:12 PITCH	162°	167°	171°	176°		176°	172°	169°	166°	163°	160°	158°	155°	153°	151°	149°	148°	146°
6:12 PITCH	158°	163°	167°	172°	176°		176°	173°	170°	167°	164°	162°	159°	157°	155°	153°	152°	150°
7:12 PITCH	155°	159°	164°	168°	172°	176°		177°	173°	170°	168°	165°	163°	161°	159°	157°	155°	154°
8:12 PITCH	151°	156°	160°	165°	169°	173°	177°		177°	174°	171°	169°	166°	164°	162°	161°	159°	157°
9:12 PITCH	148°	153°	157°	162°	166°	170°	173°	177°		177°	174°	172°	170°	167°	166°	164°	162°	161°
10:12 PITCH	145°	150°	154°	159°	163°	167°	170°	174°	177°		177°	175°	173°	170°	168°	167°	165°	163°
11:12 PITCH	142°	147°	152°	156°	160°	164°	168°	171°	174°	177°		178°	175°	173°	171°	169°	168°	166°
12:12 PITCH	140°	144°	149°	153°	158°	162°	165°	169°	172°	175°	178°		178°	176°	174°	172°	170°	169°



# SQUARE CONVERSIONS

There are 2 formulas used in square conversions; one for panels measured in inches and one for panels measured in feet. Squares are figured based on the actual width of a panel, not it's coverage. One square is equal to 14,400 square inches.

**7.2 panel with 36" of coverage** has an actual width of 38.875". One square is equal to a panel 30.868 feet long. One square of metal will give you approximately 92.6 square feet of coverage.

EXAMPLE 1:

**38.875 (or width in inches) multiplied by length in inches multiplied by # of pieces divided by 14,400**

Number of panels = 12       $\frac{38.875" \times 144" \times 12}{14,400}$       equals 4.67 squares of metal  
 Panel width = 38.875"  
 Panel length = 144"  
 Square inches = 14,400

EXAMPLE 2:

**length in feet multiplied by # of pieces divided by 30.868**

Number of panels = 12       $\frac{12 \times 12}{30.868}$       equals 4.67 squares of metal  
 Panel width = 38.875"  
 Panel length = 12'

**7.2 panel with 28.8" of coverage** has an actual width of 37.313". One square is equal to a panel 32.174 feet long. One square of metal will give you approximately 77.2 square feet of coverage.

EXAMPLE 1:

**37.313 (or width in inches) multiplied by length in inches multiplied by # of pieces divided by 14,400**

Number of panels = 12       $\frac{37.313" \times 144" \times 12}{14,400}$       equals 4.48 squares of metal  
 Panel width = 37.313"  
 Panel length = 144"  
 Square inches = 14,400

EXAMPLE 2:

**length in feet multiplied by # of pieces divided by 32.174**

Number of panels = 12       $\frac{12 \times 12}{32.174}$       equals 4.48 squares of metal  
 Panel width = 37.313"  
 Panel length = 12'

## COMMON RAFTER LENGTHS (PEAK TO SIDEWALL)

Running Feet	1:12 Pitch	2:12 Pitch	3:12 Pitch	4:12 Pitch	5:12 Pitch	6:12 Pitch	Running Feet	1:12 Pitch	2:12 Pitch	3:12 Pitch	4:12 Pitch	5:12 Pitch	6:12 Pitch
1	1' 0"	1' 1/8"	1' 3/8"	1' 5/8"	1' 11"	1' 1-3/8"	19	19' 3/4"	19' 3-1/8"	19' 7"	20' 3/8"	20' 7"	21' 2-7/8"
2	2' 1/8"	2' 3/8"	2' 3/4"	2' 1-1/4"	2' 2"	2' 2-7/8"	20	20' 7/8"	20' 3-3/8"	20' 7-3/8"	21' 1"	21' 8"	22' 4-3/8"
3	3' 1/8"	3' 1/2"	3' 1-1/8"	3' 2"	3' 3"	3' 4-1/4"	21	21' 7/8"	21' 3-1/2"	21' 7-3/4"	22' 1-5/8"	22' 9"	23' 5-3/4"
4	4' 1/8"	4' 5/8"	4' 1-1/2"	4' 2-5/8"	4' 4"	4' 5/8"	22	22' 7/8"	22' 3-5/8"	22' 8-1/8"	23' 2-1/4"	23' 10"	24' 7-1/8"
5	5' 1/4"	5' 7/8"	5' 1-7/8"	5' 3-1/4"	5' 5"	5' 7-1/8"	23	23' 1"	23' 3-3/4"	23' 8-1/2"	24' 3"	24' 11"	25' 8-5/8"
6	6' 1/4"	6' 1"	6' 2-1/4"	6' 3-7/8"	6' 6"	6' 8-1/2"	24	24' 1"	24' 4"	24' 8-7/8"	25' 3-5/8"	26' 0"	26' 10"
7	7' 1/4"	7' 1-1/8"	7' 2-5/8"	7' 4-1/2"	7' 7"	7' 9-7/8"	25	25' 1"	25' 4-1/8"	25' 9-1/4"	26' 4-1/4"	27' 1"	27' 11-3/8"
8	8' 3/8"	8' 1-3/8"	8' 3"	8' 5-1/4"	8' 8"	8' 11-3/8"	26	26' 1-1/8"	26' 4-1/4"	26' 9-1/2"	27' 5"	28' 2"	29' 3/4"
9	9' 3/8"	9' 1-1/2"	9' 3-3/8"	9' 5-7/8"	9' 9"	10' 3/4"	27	27' 1-1/8"	27' 4-1/2"	27' 9-7/8"	28' 5-5/8"	29' 3"	30' 2-1/4"
10	10' 3/8"	10' 1-5/8"	10' 3-3/4"	10' 6-1/2"	10' 10"	11' 2-1/8"	28	28' 1-1/8"	28' 4-3/4"	28' 10-1/4"	29' 6-1/4"	30' 4"	31' 3-3/4"
11	11' 1/2"	11' 1-7/8"	11' 4-1/8"	11' 7-1/8"	11' 11"	12' 3-5/8"	29	29' 1-1/4"	29' 4-7/8"	29' 10-5/8"	30' 6-7/8"	31' 5"	32' 5-1/8"
12	12' 1/2"	12' 2"	12' 4-3/8"	12' 7-3/4"	13' 0"	13' 5"	30	30' 1-1/4"	30' 5"	30' 11"	31' 7-1/2"	32' 6"	33' 6-1/2"
13	13' 1/2"	13' 2-1/8"	13' 4-3/4"	13' 8-1/2"	14' 1"	14' 6-3/8"	31	31' 1-3/8"	31' 5-1/8"	31' 11-3/8"	32' 8-1/8"	33' 7"	34' 7-7/8"
14	14' 5/8"	14' 2-3/8"	14' 8-1/8"	14' 9-1/8"	15' 2"	15' 7-7/8"	32	32' 1-3/8"	32' 5-1/4"	32' 11-3/4"	33' 8-3/4"	34' 8"	35' 9-1/4"
15	15' 5/8"	15' 2-1/2"	15' 5-1/2"	15' 9-3/4"	16' 3"	16' 9-1/4"	33	33' 1-1/2"	33' 5-1/2"	34' 1/8"	34' 9-3/8"	35' 9"	36' 10-3/4"
16	16' 5/8"	16' 2-5/8"	16' 5-7/8"	16' 10-3/8"	17' 4"	17' 10-5/8"	34	34' 1-1/2"	34' 5-3/4"	35' 1/2"	35' 10"	36' 10"	38' 1/4"
17	17' 5/8"	17' 2-7/8"	17' 6-1/4"	17' 11"	18' 5"	19' 1/8"	35	35' 1-1/2"	35' 5-7/8"	36' 7/8"	36' 10-5/8"	37' 11"	39' 1-5/8"
18	18' 3/4"	18' 3"	18' 6-5/8"	18' 11-5/8"	19' 6"	20' 1-1/2"							

# HOW TO ORDER TRIM


## STEP 1:

In CentralLink™, start by entering the Item ID.

Item ID is made of the **TRIM CODE**, a **GAUGE CODE**, and a **COLOR CODE**.

The TRIM CODE can be found with each drawing next to the trim's name.

The GAUGE CODE and COLOR CODES are found below.

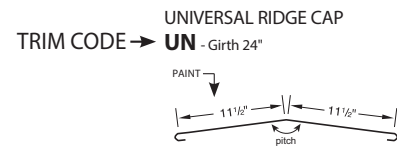

**EXAMPLE:** *Universal Ridge Cap, 26 gauge, Rustic*

**UN**   **6**   **RR**  
TRIM CODE   GAUGE CODE   COLOR CODE

**Enter Item ID**

Description: 26, Rustic, Universal Ridge Cap

**Pieces**   **Feet**   **Inches**

## STEP 2:

Then type the number of pieces you need along with the length in feet and inches.

*CentralLink order screen*

## GAUGE CODES

GAUGE	CODE
24	4
26	6
29	9

## COLOR CODES

SMP	PANEL GAUGE	TRIM GAUGE	CODE
Alamo		29	AW
Black		29	BK
Brilliant	26	29/26	BI
Brown	26	29/26	BR
Burgundy	26	29/26	BG
Burnished Slate	26	29/26	BS
Charcoal	26	29/26	CH
Colony	26	26	CG
Copper Metallic**	26	29/26	CM
Crimson	26	29/26	CR
Desert	26	26	DS
Forest		29/26	DG
Fern	26	26	FN
Gallery	26	29/26	GB
Galvalume®	26/24	26/24	GL
Galvanized		29	ZN
Gray	26	29/26	GA
Hawaiian	26	26	HB
Hunter	26	29/26	GR
Ivory		29	IV
Light Stone	26	29/26	LS
Ocean		29	OB
Pewter		29	PG
Polar	26	26	PW
Rustic	26	29/26	RR
Tan	26	29/26	TN
Taupe		29/26	TA

\* Longer lead times may apply. \*\* Copper Metallic is FEVE.  
 FEVE = Fluorinated Polymer Paint System.  
 Galvalume® is a registered trademark of BIEC International, Inc..


# ROOF TRIMS

Unless otherwise noted, trims are 26 gauge, and all angles are 90° or 45°. See page 10 for gauge and color codes.

## RIDGE CAP - Specify pitch.

### UNIVERSAL RIDGE CAP


**UN** - Girth 24"

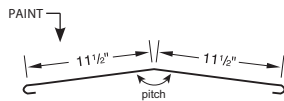

Additional pallet charge may apply.

### FORMED RIDGE CAP

**72FRC36(color)** - Length 3'

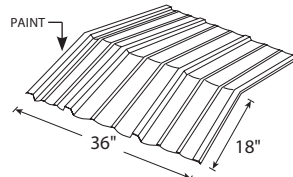


Specify pitch up to 4:12. Longer lead times may apply.

## RAKE/GABLE

### RAKE

**72RA** - Girth 20.75"



### RAKE PEAK BOX


**72PBOXF** - 2'6"



Specify pitch.


### RAKE END CAP

**REND** - Left hand shown.




### HOUSE RAKE

**72HR** - Girth 12.75"

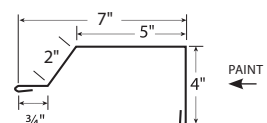

### BOX RAKE

**72BRT** - Girth 20.5"



### BOX RAKE PEAK BOX


**72PBBF** - 3'



Specify pitch.

### BOX RAKE END CAP


**BREND** - Left hand shown.



## EAVE - Specify pitch.


### HIGH-SIDE EAVE

**HI** - Girth 20.75"

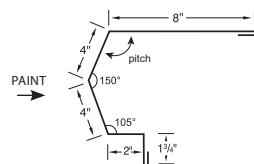


### SHORT EAVE

**SEA** - Girth 9.5"



### LONG EAVE

**LEA** - Girth 9.5"




# ROOF TRIMS


Unless otherwise noted, trims are 26 gauge, and all angles are 90° or 45°. See page 10 for gauge and color codes.

## TRANSITION TRIMS - Specify pitch.


**TRANSITION**  
**TT** - Girth 12.5"

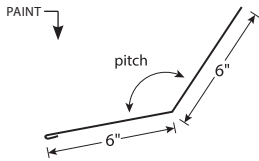


**TRANSITION**  
**GTL2** - Girth 14.5"

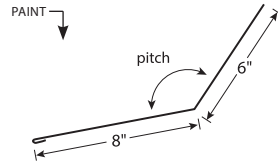


**TIE-IN**  
**TI** - Girth 10.375"

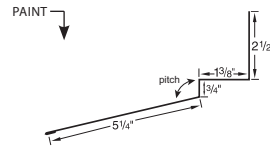


**HIGH SIDE PARAPET**  
**HSP** - Girth 10.5"



**ENDWALL**  
**EW** - Girth 10.25"

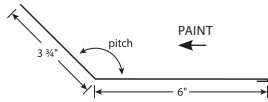


**SIDEWALL**  
**72ST** - Girth 12"




## VALLEY - Specify pitch.

**COMMERCIAL VALLEY**  
**VA** - Girth 20.75"

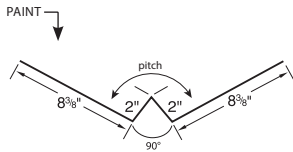

*Intended for valley lengths less than 30'.  
Additional pallet charge will apply.*


**EXTENDED VALLEY**  
**EVA** - Girth 41.5"

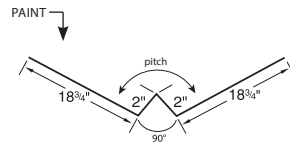

*Intended for valley lengths greater than 30'.  
Additional pallet charge will apply.*

## MISC. TRIMS

**SNOW GUARD**  
**SG1** - Girth 5.5"



*Available in 10'2" only.*

**FLAT SHEET**  
**FS4** - 24 gauge. Girth 48.5"  
**FS6** - 26 gauge. Girth 41.5625"




*10 sheets or fewer will be packaged in a roll.  
Additional pallet charge on orders of 10 or more.*


# WALL TRIMS

Unless otherwise noted, trims are 26 gauge, and all angles are 90° or 45°. See page 10 for gauge and color codes.


**OUTSIDE CORNER**  
**72OU** - Girth 14.25"

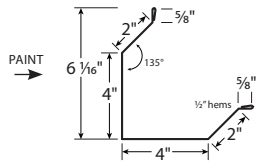


**INSIDE CORNER**  
**72IN** - Girth 14.5"




**ZEE TRIM**  
**ZE** - Girth 5.875"




**WAINSCOT**  
**WA** - Girth 7.75"



**COMMERCIAL RAT GUARD**  
**RGC** - Girth 8.3125"




**BASE TRIM**  
**BA** - Girth 6.125"



## ANGLE TRIMS


**INSIDE ANGLE**

- IA2X2** - Girth 5"
- IA3X3** - Girth 7"
- IA4X4** - Girth 9"

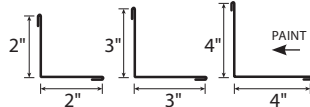

**OUTSIDE ANGLE**


- SA2X2** - Girth 5"
- SA3X3** - Girth 7"
- SA4X4** - Girth 9"

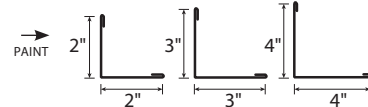

## FRAMED OPENING TRIMS


**HEAD TRIM**

- 72HE** - Girth 6"




**JAMB**

- 72JA** - Girth 5.5"




**JAMB HEADER**

- JH** - Girth 13"



# GUTTERS

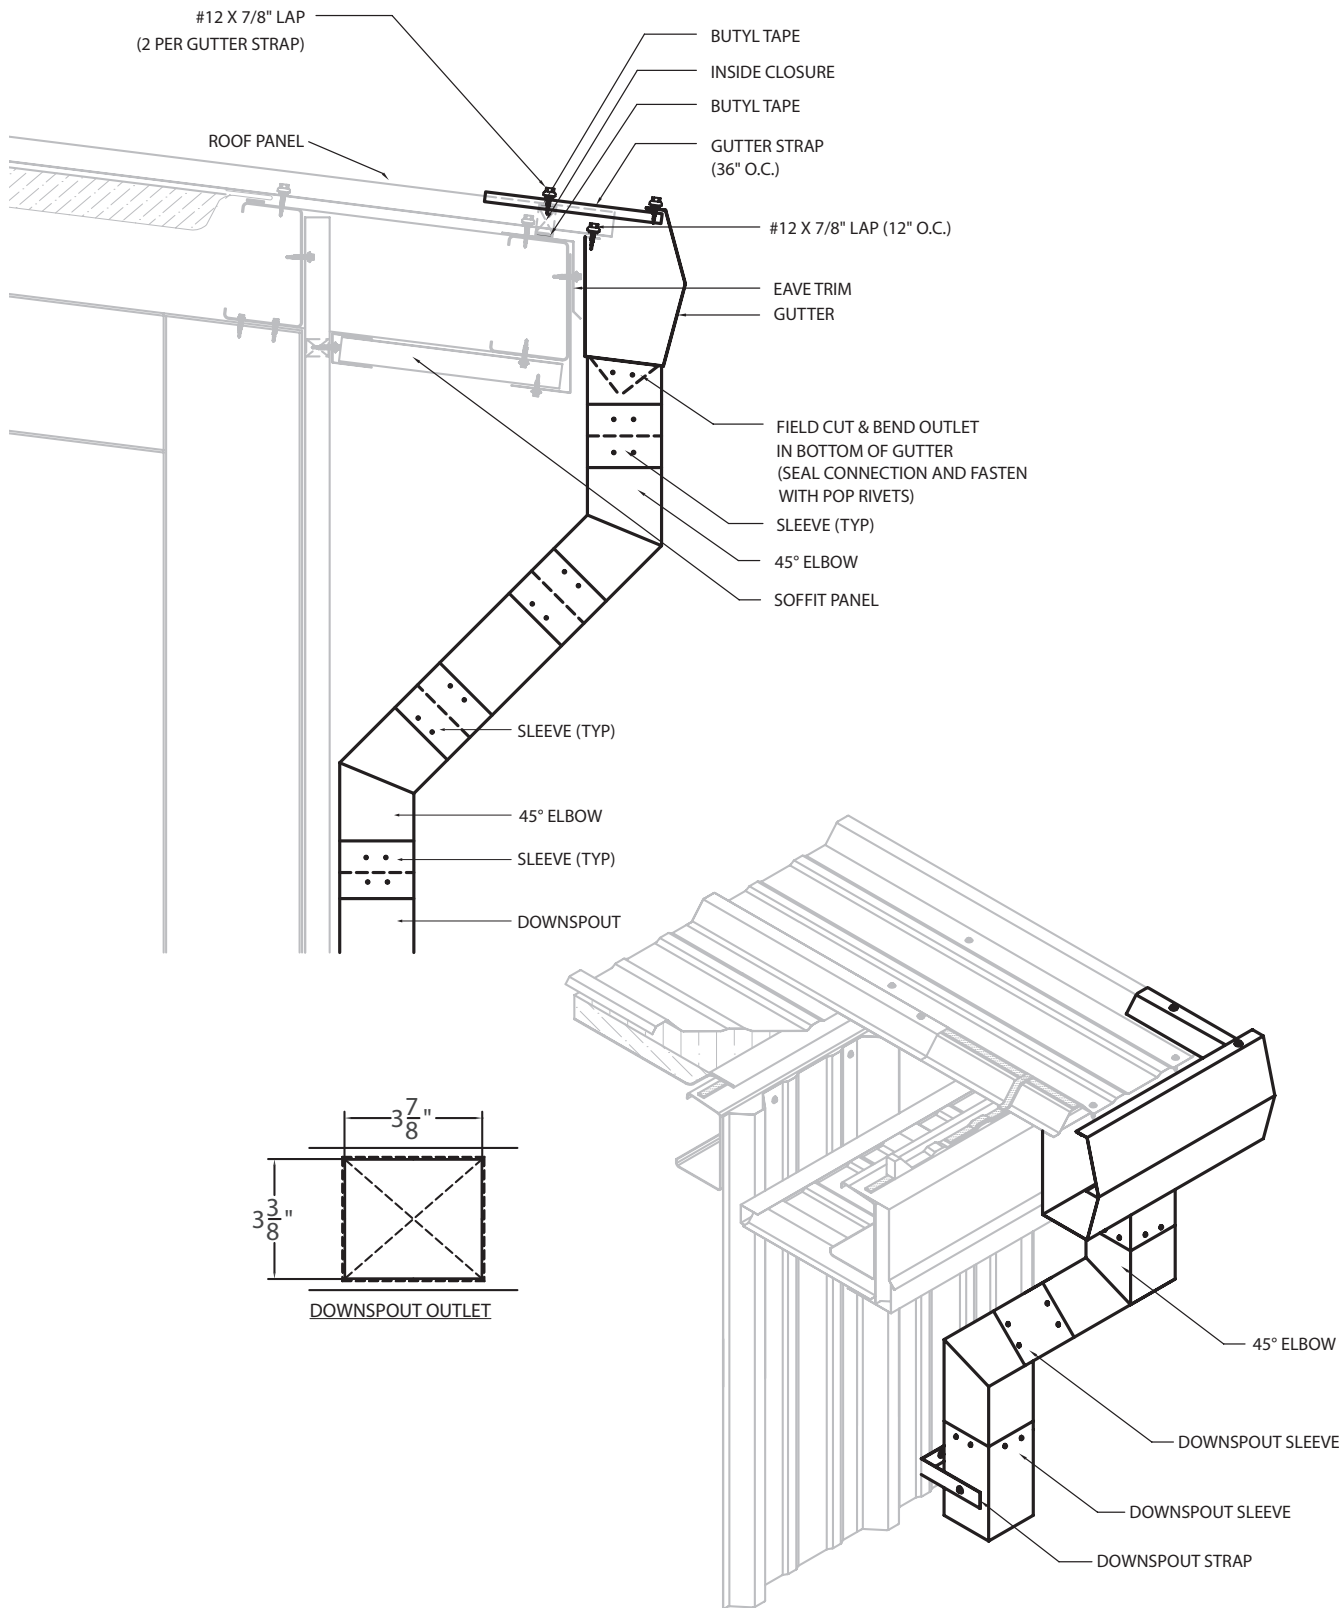


# GUTTERS


Unless otherwise noted, trims are 26 gauge, and all angles are 90° or 45°. See page 10 for gauge and color codes.

## SCULPTURED GUTTERS


HANG-ON 0-4:12 PITCH  
**72GU** - Girth 20.5"

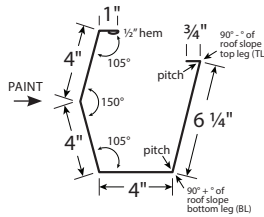


HANG-ON 5:12 PITCH  
**72GU5** - Girth 21.9375"



HANG-ON 6:12 PITCH  
**72GU6** - Girth 22.1875"




OUTSIDE CORNER BOX  
**OCB** - Specify pitch.




Use with sculptured gutters.


EAVE 0-4:12 PITCH  
**72SGU** - Girth 23.75"




EAVE 5:12 PITCH  
**72SGU5** - Girth 25.1875"



EAVE 6:12 PITCH  
**72SGU6** - Girth 25.4375"



INSIDE CORNER BOX  
**ICB** - Girth 25.6875"

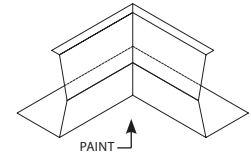


Use with sculptured gutters.

## BOX GUTTERS


- Dimension "A" will change depending on chosen pitch.

HANG-ON



PART #	PITCH	GIRTH	DIM. "A"
<b>72BHG</b>	0-4:12	17.25"	4"
<b>72BHG5</b>	5:12	18.6875"	5.4375"
<b>72BHG6</b>	6:12	18.9375"	5.6875"


BOX EAVE

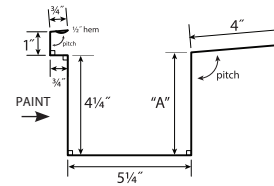


PART #	PITCH	GIRTH	DIM. "A"
<b>72BEG</b>	0-4:12	20.75"	4"
<b>72BEG5</b>	5:12	22.1875"	5.4375"
<b>72BEG6</b>	6:12	22.4375"	5.6875"

## DOWNSPOUTS


DOWNSPOUT W/O KICKOUT  
**DS** - Girth 16"



DOWNSPOUT WITH KICKOUT  
**DK**




DOWNSPOUT OUTLET  
**DSOUTLET**




Specify pitch. 1/2" turndowns.


DOWNSPOUT CONNECTOR  
**DSLVE**




DOWNSPOUT ELBOW  
**DSE45**  
**DSE90**



DOWNSPOUT STRAP  
**DSS**




GUTTER STRAP  
**72GS9**

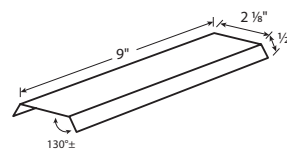

GUTTER END CAP - Specify pitch.

**GEN** - For sculptured gutters.  
**BGEN** - For box gutters.

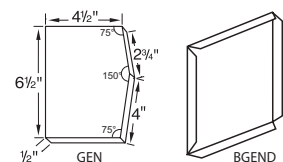


# ACCESSORIES

## FASTENERS

Fastener color availability may vary by location, contact your sales consultant for details. Order fasteners in increments of 250 pieces.

TYPE	PART #	LENGTH	DIAMETER	HEAD	COLOR	#BAG
METAL/METAL	<b>114(color)MM</b>	1 1/4"	#12	5/16" Hex	all	250
METAL/METAL	<b>2ZMM</b>	2"	#12	5/16" Hex	galvanized	250
METAL/METAL LAP	<b>78(color)LAP</b>	7/8"	#14	5/16" Hex	all	250
ZAC METAL/METAL	<b>114ZACMM</b>	1 1/4"	#12	5/16" Hex	galvanized	250
ZAC METAL/METAL LAP	<b>78ZACLAP</b>	7/8"	#14	5/16" Hex	galvanized	250

## DOORS & FRAMING PACKAGE - Longer lead times may apply.




DOOR LEAF - *Steel door leaf only.*

**3070DOOR** - 3' x 7'

**3070DOORW/LITE** - 3' x 7' with window.

**4070DOOR** - 4' x 7'



FRAMING PACKAGE - *White.*

**4X3070JAMB** - 4.25" x 3070

**4X4070JAMB** - 4.25" x 4070

**6X3070JAMB** - 6.25" x 3070

**6X4070JAMB** - 6.25" x 4070

**8X3070JAMB** - 8.25" x 3070

**8X4070JAMB** - 8.25" x 4070


**8X6070JAMB** - 8.25" x 6070

*Package includes: Jamb, headers, threshold, door lever with keyed lock, hinges, and weather strip kit. Frames are non-reversible. Swing-out only.*



# ACCESSORIES

## BUTYL TAPE




PART #	LENGTH	WIDTH	THICKNESS	ROLLS PER BOX
<b>BTL</b> <i>Recommended for 7.2 panel.</i>	45'	3/4"	3/32"	24
<b>BTR</b>	40'	7/8"	3/16"	10
<b>BT3/8</b>	45'	3/8"	3/32"	40

*Install between fastener and exposed edge.  
Rolls per box may vary by location and vendor. Check with your sales consultant for details.*

## TOUCH UP PAINT

**TP(color)** - SMP, 0.6 oz. bottle w/brush.  
**12PURSP** - Purlin paint. 12 oz. spray.



## SEALANT



PART #	SIZE	COLOR
<b>GEO(color)</b>	10.3 oz. tube	clear, gray, white
<b>MRS10(color)</b>	10.3 oz. tube	call for colors
<b>MRS10CLEAR</b>	10.3 oz. tube	clear


## CLOSURES

UNIVERSAL FOAM CLOSURE  
**72CLOUT** - No Glue.  
**72CLOUTGLUE** - With Glue.



*Length - 3'. 100 per box.*

GRAYFLEX  
**GRAYFLEX115** - 24-rolls per box.  
*For use with hips and valleys.*



*Length 13'. Width 1". Thickness 1 1/2".*

UNIVERSAL POLYFOAM  
**POLYG** - With Glue. 10-rolls per box.



*Length 25'. Width 1 1/2". Thickness 1 1/2".*


FLEXOVENT  
**FLEXOVENT** - (2) 10' rolls per box.



*Length 10'. Width 3". Thickness 1 1/2".*

## MASTER PIPE FLASHING - Install in a diamond shape and not parallel to the rib.

Square - Max temperature 250°.




**MPF** - Pipe size .25" to 5.75"  
**MPF2** - Pipe size .875" to 4"  
**MPF4** - Pipe size 2.75" to 7"  
**MPF6** - Pipe size 4.75" to 10"  
**MPF8** - Pipe size 6.75" to 13.5"

Silicone - Orange, high temp max 500°.

**4SMPF** - Pipe size 2.75" to 7"  
**6SMPF** - Pipe size 4.75" to 10"  
**8SMPF** - Pipe size 6.75" to 13.5"

Square with zipper - Max temperature 250°.



**MPF1ZIP** - Pipe size .5" - 4"  
**MPF2ZIP** - Pipe size 4" - 9.25"

# SECONDARY FRAMING


Members can be manufactured to the nearest 1/8" in length from 6'0" to 45'0". For lengths under 6'0" or over 45'0", call your sales consultant.



Central States has met the requirements to earn the accreditation for Cold-Formed Steel Structural and non-Structural Components Not Requiring Welding

For more information, go to [www.iasonline.org](http://www.iasonline.org).


## ANGLE




## CHANNEL




## CEE



## LCSI ZEE




## ZEE




## EAVE STRUTS


\* Specify pitch and slope when ordering.  
For low pitch add a "L" to the end of the code. For high pitch add a "H" to the end of the code.




Single Slope Up



Single Slope Down




Double Slope Up



Double Slope Down

## HAT CHANNEL

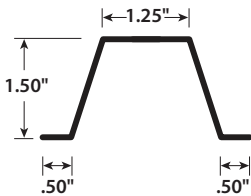

**HAT20Z202** - 20'2" length, 20 gauge, galvanized.


**HATZ** - Specify length, 20 gauge, galvanized.

**HAT16Z** - Specify length, 16 gauge, galvanized.

## PURLIN CLIPS


### GIRT CLIP

**GIRTCLIP** - 10 gauge.




### MINI CLIP

**MINICLIP** - 16 gauge.



### BASE CLIP

**BASECLIP** - 14 gauge.



Galvanized.

# SECONDARY FRAMING

TYPE	A x B	GAUGE	ITEM CODE RED OXIDE	ITEM CODE GALVANIZED	TYPE	WEB x A x B	GAUGE	ITEM CODE RED OXIDE	ITEM CODE GALVANIZED
Angle	2.5 x 2.5	14	B2514R		LGSI ZEE	6 x 2 $\frac{3}{8}$ x 2 $\frac{1}{2}$	16	Z62516R	Z62516Z
Angle	3 x 3	16	B316R	B316Z	LGSI ZEE	6 x 2 $\frac{3}{8}$ x 2 $\frac{1}{2}$	14	Z62514R	Z62514Z
Angle	3 x 3	14	B314R	B314Z	LGSI ZEE	8 x 2 $\frac{3}{8}$ x 2 $\frac{1}{2}$	16	Z82516R	Z82516Z
Angle	4 x 2	16	B4216R	B4216Z	LGSI ZEE	8 x 2 $\frac{1}{2}$ x 2 $\frac{1}{2}$	14	Z82514R	Z82514Z
Angle	4 x 2	14	B4214R	B4214Z	LGSI ZEE	8 x 2 $\frac{3}{8}$ x 2 $\frac{1}{2}$	12	Z82512R	Z82512Z
Angle	4 x 3	16	B4316R		LGSI ZEE	8 x 3 $\frac{3}{8}$ x 3 $\frac{1}{2}$	16	Z83516R	Z83516Z
					LGSI ZEE	8 x 3 $\frac{3}{8}$ x 3 $\frac{1}{2}$	14	Z83514R	Z83514Z
					LGSI ZEE	8 x 3 $\frac{3}{8}$ x 3 $\frac{1}{2}$	12	Z83512R	Z83512Z
					LGSI ZEE	10 x 2 $\frac{3}{8}$ x 2 $\frac{1}{2}$	16	Z102516R	Z102516Z
					LGSI ZEE	10 x 2 $\frac{3}{8}$ x 2 $\frac{1}{2}$	14	Z102514R	Z102514Z
					LGSI ZEE	10 x 2 $\frac{3}{8}$ x 2 $\frac{1}{2}$	12	Z102512R	Z102512Z
					LGSI ZEE	10 x 2 $\frac{7}{8}$ x 2 $\frac{1}{2}$	14	Z10314R	Z10314Z
					LGSI ZEE	10 x 2 $\frac{7}{8}$ x 2 $\frac{1}{2}$	12	Z10312R	
					LGSI ZEE	12 x 2 $\frac{3}{8}$ x 2 $\frac{1}{2}$	14	Z122514R	Z122514Z
					LGSI ZEE	12 x 2 $\frac{3}{8}$ x 2 $\frac{1}{2}$	12	Z122512R	Z122512Z
					LGSI ZEE	12 x 3 $\frac{3}{8}$ x 3 $\frac{1}{2}$	14	Z123514R	Z123514Z
					LGSI ZEE	12 x 3 $\frac{3}{8}$ x 3 $\frac{1}{2}$	12	Z123512R	Z123512Z
					LGSI ZEE	12 x 3 $\frac{3}{8}$ x 3 $\frac{1}{2}$	16	Z12416R	Z12416Z
					TYPE	WEB x A x B	GAUGE	RED OXIDE	GALVANIZED
Eave Strut	6 x 4 x 3	16	E64316R*	E64316Z*	ZEE	4 x 2 x 2	16	Z4216R	Z4216Z
Eave Strut	6 x 4 x 3	14	E64314R*	E64314Z*	ZEE	4 x 2.5 x 2.5	16	Z42516R	Z42516Z
Eave Strut	6 x 4 x 3	12	E64312R*	E64312Z*	ZEE	4 x 2.5 x 2.5	14	Z42514R	Z42514Z
Eave Strut	8 x 4 x 3	14	E84314R*	E84314Z*	ZEE	4 x 2.5 x 2.5	12	Z42512R	Z42512Z
Eave Strut	8 x 4 x 3	12	E84312R*	E84312Z*	ZEE	4 x 3.5 x 3.5	16	Z43516R	Z43516Z
Eave Strut	8 x 5 x 3	14	E85314R*	E85314Z*	ZEE	4 x 3.5 x 3.5	14	Z43514R	Z43514Z
Eave Strut	8 x 5 x 3	12	E85312R*	E85312Z*	ZEE	6 x 2.5 x 2.5	16	Z62516R	Z62516Z
Eave Strut	8 x 5 x 5	14	E85514R*		ZEE	6 x 2.5 x 2.5	14	Z62514R	Z62514Z
Eave Strut	10 x 5 x 3	14	E105314R*		ZEE	8 x 2.5 x 2.5	16	Z82516R	Z82516Z
					ZEE	8 x 2.5 x 2.5	14	Z82514R	Z82514Z
					ZEE	8 x 2.5 x 2.5	12	Z82512R	Z82512Z
					ZEE	8 x 3.5 x 3.5	16	Z83516R	Z83516Z
					ZEE	8 x 3.5 x 3.5	14	Z83514R	Z83514Z
					ZEE	8 x 3.5 x 3.5	12	Z83512R	Z83512Z
					ZEE	9 x 3 x 3	14	Z9314R	Z9314Z
					ZEE	9 x 3 x 3	12	Z9312R	Z9312Z
					ZEE	10 x 2.5 x 2.5	16	Z102516R	Z102516Z
					ZEE	10 x 2.5 x 2.5	14	Z102514R	Z102514Z
					ZEE	10 x 2.5 x 2.5	12	Z102512R	Z102512Z
					ZEE	10 x 3.5 x 3.5	14	Z103514R	Z103514Z
					ZEE	10 x 3.5 x 3.5	12	Z103512R	Z103512Z
					ZEE	12 x 2.5 x 2.5	14	Z122514R	Z122514Z
					ZEE	12 x 2.5 x 2.5	12	Z122512R	Z122512Z
					ZEE	12 x 3.5 x 3.5	14	Z123514R	Z123514Z
					ZEE	12 x 3.5 x 3.5	12	Z123512R	Z123512Z
					ZEE	12 x 4 x 4	16	Z12416R	Z12416Z
TYPE	WEB x A x B	GAUGE	RED OXIDE	GALVANIZED					
CEE	4 x 2 x 2	16	C4216R	C4216Z					
CEE	4 x 2.5 x 2.5	16	C42516R	C42516Z					
CEE	4 x 2.5 x 2.5	14	C42514R	C42514Z					
CEE	4 x 2.5 x 2.5	12	C42512R	C42512Z					
CEE	4 x 3.5 x 3.5	16	C43516R	C43516Z					
CEE	4 x 3.5 x 3.5	14	C43514R	C43514Z					
CEE	6 x 2.5 x 2.5	16	C62516R	C62516Z					
CEE	6 x 2.5 x 2.5	14	C62514R	C62514Z					
CEE	8 x 2.5 x 2.5	16	C82516R	C82516Z					
CEE	8 x 2.5 x 2.5	14	C82514R	C82514Z					
CEE	8 x 2.5 x 2.5	12	C82512R	C82512Z					
CEE	8 x 3.5 x 3.5	16	C83516R	C83516Z					
CEE	8 x 3.5 x 3.5	14	C83514R	C83514Z					
CEE	8 x 3.5 x 3.5	12	C83512R	C83512Z					
CEE	9 x 3 x 3	14	C9314R	C9314Z					
CEE	9 x 3 x 3	12	C9312R	C9312Z					
CEE	10 x 2.5 x 2.5	16	C102516R	C102516Z					
CEE	10 x 2.5 x 2.5	14	C102514R	C102514Z					
CEE	10 x 2.5 x 2.5	12	C102512R	C102512Z					
CEE	10 x 3.5 x 3.5	14	C103514R	C103514Z					
CEE	10 x 3.5 x 3.5	12	C103512R	C103512Z					
CEE	12 x 2.5 x 2.5	14	C122514R	C122514Z					
CEE	12 x 2.5 x 2.5	12	C122512R	C122512Z					
CEE	12 x 3.5 x 3.5	14	C123514R	C123514Z					
CEE	12 x 3.5 x 3.5	12	C123512R	C123512Z					
CEE	12 x 4 x 4	16	C12416R	C12416Z					

\*For low pitch add a "L" to the end of the code. For high pitch add a "H" to the end of the code.

# STANDARD PUNCH PATTERNS


Punch capabilities vary by location. Call for pricing and availability on special punching.

Punches cannot be made on secondary framing members shorter than 3".

Holes are punched to accommodate 1/2" diameter bolts.


## Standard hole sizes:

LOCATION	5/16" ROUND	5/8" ROUND	5/8" X 3/4" SLOT
Lowell	X	X	X
Jasper	X		X
Cedar Hill		X	X
Seguin		X	X
Claysburg		X	X

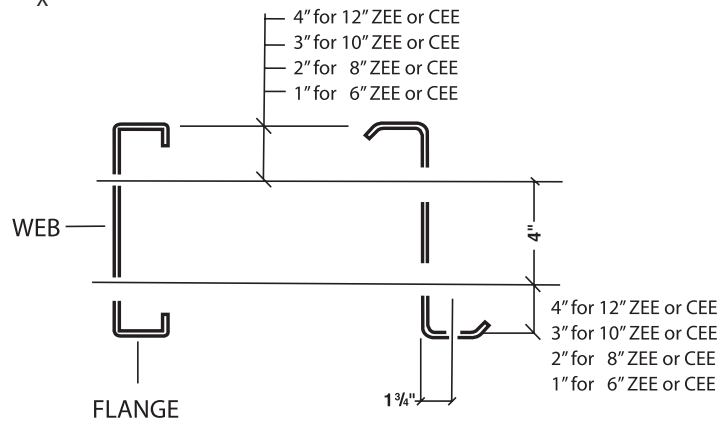


## FLANGE PATTERNS - Punches can be placed on either or both ends.


EAVE STRUT FOR 4" LEG  
**ES4**

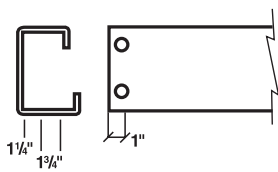


EAVE STRUT FOR 5" LEG  
**ES5**

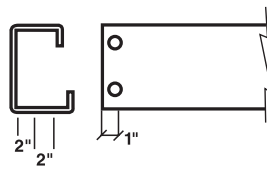

EAVE STRUT FOR 5" LEG  
**ES134**

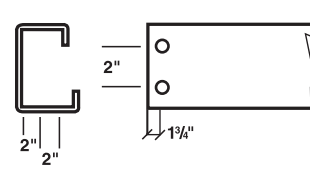


PATTERN D - OPTIONAL FLANGE  
**PPD**

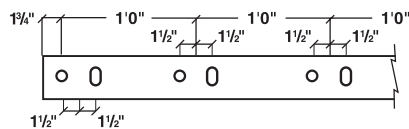


Use with web pattern A.

PATTERN E - OPTIONAL FLANGE  
**PPE**

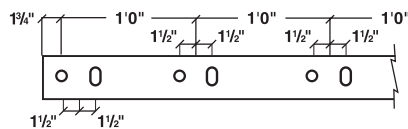

Use with web pattern B.

PATTERN F - OPTIONAL FLANGE  
**PPF**

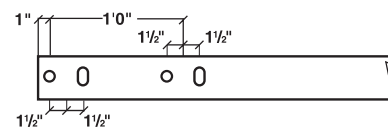


Use with web pattern C.


# STANDARD PUNCH PATTERNS

## WEB PATTERNS - Punches can be placed on either or both ends.


**END PUNCH  
PPEP**



**PATTERN H STANDARD WEB END  
PPH**




**SIMPLE SPAN PUNCH  
PPSS**

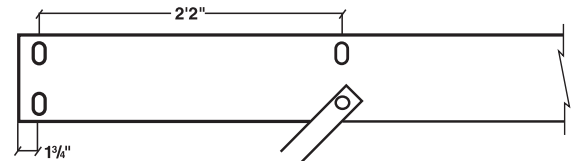


Minimum part length 5' total, 2'6" one end.

**SHORT LAP PUNCH  
PPSL**

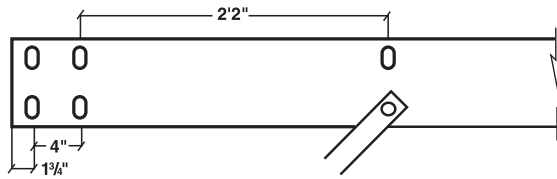


Minimum part length 5'6" total, 2'8" one end.

**LONG LAP PUNCH  
PPLL**

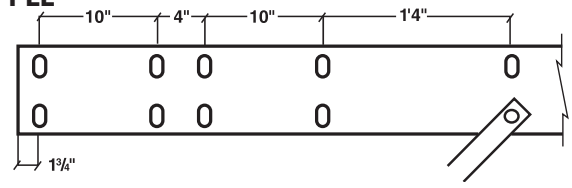


Minimum part length 7' total, 3'6" one end.


**PATTERN A - STANDARD WEB - 9' Minimum length if punched on both ends; 4'6" if punched on one end.  
PPA**

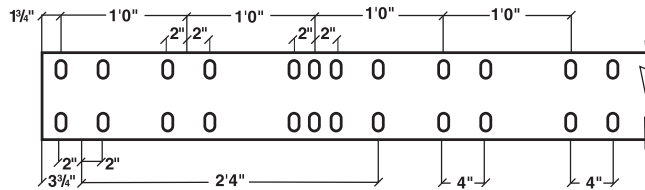

**PATTERN B - STANDARD WEB - 12'5" Minimum length if punched on both ends; 6'2.5" if punched on one end.  
PPB**

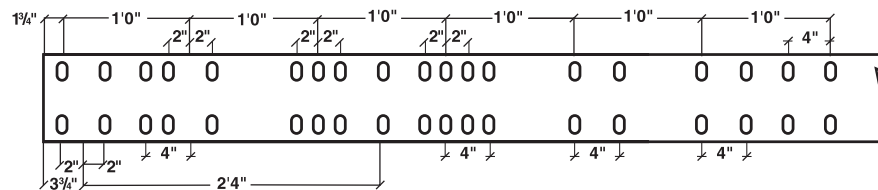

**PATTERN C - STANDARD WEB - 7' Minimum length if punched on both ends; 3'6" if punched on one end.  
PPC**

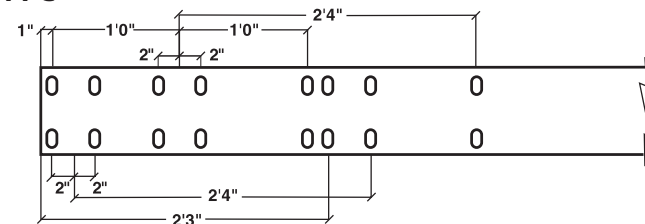







Right.  
On Time.  
Every Time.®

[centralstatesco.com](http://centralstatesco.com)